


Overview

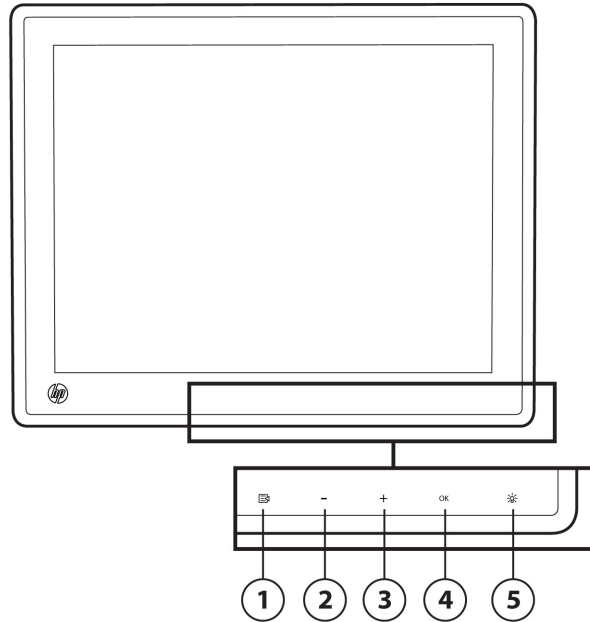

NOTE: To activate the OSD menu, touch the lower front bezel to the left of the power icon. The OSD icons will become illuminated and the OSD functions become active. The OSD icons will extinguish upon exit from the OSD or OSD timeout.

- | | | | | | |
|-----------|----------------|---|-----------|------------------|--|
| 1. | Menu | Opens the On-Screen Display (OSD) main menu. | 4. | OK | If the OSD menu is on, tap to select a menu item. If the OSD menu is inactive and the icons are illuminated, tap to activate the auto adjustment feature to optimize the screen image. |
| 2. | - Minus | If the OSD menu is on, tap to navigate backward through the OSD menu and decrease adjustment levels. If the OSD menu is inactive and the icons are illuminated, tap to open the OSD volume control menu and adjust the volume level. | 5. | Power LED | Green = Fully powered.
Amber = Sleep mode.
Flashing Amber = Sleep Timer mode.
Off = Power is off or the LED has been suppressed in the OSD |
| 3. | + Plus | If the OSD menu is on, tap to navigate forward through the OSD menu and increase adjustment levels. If the OSD menu is inactive and the icons are illuminated, tap to activate the Source button that chooses the video signal input. | | | |

Stand is not included and is sold separately.

Overview

Model

HP L6010 10.4-inch Retail Monitor

A1X76AA

Introduction

The HP L6010 Monitor is a sleek, stylish and compact, head-only display specifically designed to be used with the HP Retail Point of Sale systems. The small size and industry standard VESA mount capability make it an ideal secondary customer-facing display for sharing engaging video and graphical content or as an operator display in space-constrained environments. DisplayPort, DVI-D, and VGA video inputs provide the highest degree of connection flexibility.

Key Benefits

- Industrial design to help protect the monitor in the most demanding retail and hospitality environments
- Compact space saving design to best fit your environment
- Industry-standard, 75mm VESA patterns enable flexible mounting in a variety of retail settings
- Flush-glass design provides an easy-to-clean surface
- Designed to work with HP Retail Point of Sale systems to deliver a complete retail solution
- Optional dual height adjustable stand (sold separately) provides two height settings and viewing angle flexibility that allows the display to be customized for your exact countertop work space

Technical Specifications

Panel	Type	10.4-inch TN (Twisted Nematic) LED Backlit LCD
	Viewable Image Area (diagonal)	26.4 cm (10.4 in)
	Aspect Ratio	4:3
	Viewing Angle (typ)*	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
	Response Rate	25 ms (typical)
	Brightness (typ)*	300 nits (cd/m ²)
	Contrast Ratio (typ)*	1000:1
	Pixel Pitch	0.206 mm
	Color Gamut	57%
<i>*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.</i>		
On Screen Display (OSD) Controls	Buttons or Switches	Menu, Minus, Plus, OK, Power
	Languages	English, French, German, Italian, Dutch, Spanish, Japanese, Portuguese, Traditional Chinese, and Simplified Chinese.
	User Controls	Brightness Contrast Color Temperature Image Control OSD Control Management Language Information Factory Reset Source Control Exit
Signal Interface/ Performance	Horizontal Frequency	24 to 83 kHz
	Vertical Frequency	50 to 76 Hz
	Graphics Controller	VESA standard timings/formats supported
	Native Resolution	1024 x 768 @ 60 Hz (recommended)
	Preset VESA Graphic Modes (non-interlaced)	1024 x 768 @ 60 Hz
		800 x 600 @ 60 Hz
		720 x 400 @ 70 Hz
		640 x 480 @ 60 Hz
	Maximum Pixel Clock Speed	140 MHz
	User Programmable Modes	Yes, 10
	Anti-Glare	Yes
Anti-Static	Yes	
Default Color Temperature	Standard (6500K)	

Technical Specifications

Video/Other Inputs	Plug and Play	Yes		
	Input Signal	(1) VGA; (1) DisplayPort and (1) DVI-D NOTE: HDCP supported on digital inputs.		
	Input Impedance	75 ohms (2 % value change allowed)		
	Sync Input	TTL separate synch		
	Video Cables	(1) VGA; (1) DisplayPort and (1) DVI-D included		
	Video Cable Length	1,8 m (5.9 ft.)		
	USB 2.0	(1) USB 2.0 downstream; (1) USB upstream; (1) USB cable included		
	USB Cable Length	1,8 m (5.9 ft.)		
Audio	Speakers and I/O	(2) 1W/channel built-in speakers (rear firing); (1) Audio-in; (1) audio cable included		
	Audio Cable Length	1,8 m (5.9 ft.)		
Power	Input Voltage	90 to 264 VAC		
	Frequency	50/60 Hz		
	Typical Power Consumption	11 W		
	Maximum	18 W		
	Sleep	1 W		
	Off	0.5 W		
	Power Cable Length	1,9 m (6.2 ft.); detachable		
	Mechanical	Dimensions (W x D x H)	Unpacked w/stand	25,4 x 16,8 x 30,5 cm (10 x 6.6 x 12 in)
Display Head only			25,4 x 4,1 x 20,8 cm (10 x 1.6 x 8.2 in)	
Packaged			36,2 x 15,6 x 28 cm (14.3 x 6.1 x 11 in)	
Weight		Unpacked	1,2 kg (2.6 lb)	
		Unpacked (with stand – sold separately)	2,2 kg (4.8 lb)	
		Packaged	4 kg (8.8 lb)	
Environmental		Temperature – Operating	5° to 40° C (41° to 104° F) non-condensing	
	Temperature – Non-operating	-20° to 60° C (-4° to 140° F) non-condensing		
	Humidity – Operating	20% to 80% non-condensing		
	Humidity – Non-operating	5 % to 95 % non-condensing		
	Altitude – Operating	0 to 5000 m (0 to 16400 ft)		
	Altitude – Non-operating	0 to 12192 m (0 to 40000 ft)		
	White LED Backlights	Yes		
	CCFL Panel	No		
	Arsenic-Free Glass¹	Yes		
BFR/PVC Free²	Yes (everything except external cables)			

Technical Specifications

	Mercury Free	No
What's in the box?	Monitor and accessories	HP L6010 10.4-inch Retail Monitor; VGA cable; DisplayPort cable; DVI-D cables, USB cable; Audio cable; Power cord; Adapter
	Documentation	Printed documentation and CD
	Featured Software	None
Other	User Guide Languages	English, French, German, Italian, Dutch, Spanish, Japanese, Portuguese, T. Chinese, S. Chinese.
	Warranty Languages	English, French, German, Italian, Dutch, Spanish, Japanese, Portuguese, T. Chinese, S. Chinese.
	Color	HP Jack Black
	VESA External Mounting	Yes (Standard 4 hole pattern, 75 mm)
	Kensington Lock-ready	Yes
Certification and Compliance	UL Listed, CSA for Canada and US, FCC approval, ICES, BSMI for Taiwan, CCC/CECP/SEPA/CEL for China, C-Tick for Australia, S-Mark for Argentina, CB, CE approval, VCCI, ENERGY STAR®	
Operating System Support	Microsoft Windows 7 32-bit Professional Microsoft Windows 7 64-bit Professional Microsoft Windows Embedded for Point of Service Microsoft Windows Embedded POSReady Microsoft Windows Vista Business 32 Edition Microsoft Windows XP Professional	
Compatibility	Compatible with platforms using the VESA standard video modes.	
Service and Warranty	Protected by HP, including a 3 years parts, 3 years labor (3/3/0) standard limited warranty. Certain restrictions and exclusions apply. ³	
Additional Options (sold separately)	HP Dual Position L6010 Stand (A1X79AA)	The dual position stand supports the 10.4" monitor (L6010) <ul style="list-style-type: none"> ● Ruggedized, small footprint maximizes counter space for employees and customers ● Allows the monitor to be set on a counter for customer facing usage ● The two height positions and tilt adjustments help you customize positioning to best meet your environment's needs
Stand Specifications	Tilt Range	-5 to +35 degrees
	Swivel Range	No
	Height Adjustable	Yes, two position (height differential of 69 mm)
	Pivot Rotation	No
	Base and Stand	Undetachable
	Dimensions (W x D x H)	19,3 x 16,79 x 22,5 cm (7.59 x 6.6 x 8.86 in)
	Weight	Unpacked 1 kg (2.25 lb) Packaged 1,7 kg (3.75 lb)
	Color	HP Jack Black

Technical Specifications

© Copyright 2012 Hewlett-Packard Development Company, L.P.

ENERGY STAR® is a US registered mark of the United States Environmental Protection Agency.

¹ Arsenic and its compounds were not detected using US EPA Test Methods 3052 & 3052/6010b by ICP or ICP-AES.

² Meets the evolving definition of 'BFR/PVC-free' as set forth in the "iNEMI Position Statement on the 'Definition of Low-Halogen' Electronics (BFR/CFR/PVC-Free)". Plastic parts contain < 1000 ppm (0.1%) of bromine [if the Br source is from BFRs] and < 1000 ppm (0.1%) of chlorine [if the Cl source is from CFRs or PVC or PVC copolymers]. All printed circuit board (PCB) and substrate laminates contain bromine/chlorine total < 1500 ppm (.15%) with a maximum chlorine of 900 ppm (.09%) and maximum bromine being 900 ppm (.09%). External cables (power, video and USB) are not BFR/PVC-free. Service parts after purchase may not be BFR/PVC-free.

³ HP Care Pack Services extend service contracts beyond the standard warranties. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at <http://www.hp.com/hps/carepack>.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft, Windows, Windows XP, Windows Vista and Windows 7 are trademarks of the Microsoft group of companies. May 2012

Legacy Technology Services

We Rent & Sell All Types Of Barcode Equipment

Call now to talk to an expert

866-271-9891

www.LegacyGlobal.com

Some brands we carry




MOTOROLA

Intermec

DATALOGIC™

Honeywell

EQUINOX
PAYMENTS



About us

- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

Latest Hardware from top manufacturers

- Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

Expert Repair and Maintenance services

- Legacy is one of the best repair facilities in North America

Discontinued product sourcing

- They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

Trade-in and Disposal services

- That old equipment laying around your facility may still have some value. Legacy routinely purchases equipment from our clients around the globe.
 - Data destruction
 - Hardware disposal
 - Auditing services

Dedicated client account team

- Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

Equipment rental services

- Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.



Legacy, Inc.

160 West Road,
Ellington, CT 06029

Toll Free: 866-271-9891

Fax: 888-522-4684