

Philips
LCD monitor

117 cm (46")

multimedia Full HD

BDL4640E



Deliver a stunning image to your audience

with this full HD LCD Display

This 117 cm (46") professional LCD monitor will deliver your message. Whether used in a network, a tiled matrix or as a single public display, this model offers a variety of features to meet the most demanding applications

Optimized for public viewing

- Full HD LCD display, 1920x1080p
- HDMI input for full digital HD connection in one cable
- Enhanced zoom feature supports tiled matrix applications

Lower total cost of ownership

- Advanced anti image sticking function
- SmartPower for energy saving

Operational flexibility

- Monitor is network controllable for remote management
- Portrait mode operability
- VGA Loopthrough
- Hidden and lockable control buttons

Sustainable and safe

- Complies with RoHS standards to care for the environment

PHILIPS

sense and simplicity

Highlights

Full HD LCD display 1920x1080p

This display has a resolution that is referred to as Full HD. The state-of-the-art LCD screen technology has the full high-definition widescreen resolution of 1080 progressive lines, each with 1920 pixels. This allows the best possible picture quality for HD input signals with up to 1080 lines. It produces brilliant flicker-free progressive scan pictures with optimum brightness and superb colors. This vibrant and sharp image will provide you with an enhanced viewing experience.

HDMI input

HDMI makes an uncompressed digital RGB connection from the source to the screen. By eliminating conversion to an analog signal, it delivers an unblemished image. The non-degraded signal reduces flicker and leads to a clearer picture. HDMI intelligently communicates the highest output resolution with the source device. The HDMI input is fully backward compatible with DVI sources but

includes digital audio. HDMI uses HDCP copy protection.

Advanced anti image sticking

Static images left on-screen for extended periods of time may leave a "ghost image" or image sticking effect on LCD displays. Although image sticking in LCD displays is not permanent, you want to prevent this to happen, especially in locations where content is shown 24/7.

Compliant with RoHS standards

Philips designs and produces display products in compliance with strict Restriction of Hazardous Substances (RoHS) standards that restrict lead and other toxic substances that can harm the environment.

Zoom function for tiled matrix

The internal zoom function enables easy implementation of a video wall matrix, without the need for expensive external equipment.

Capable of a videowall of 25 displays by dividing up to 5 displays each horizontally and vertically.

SmartPower

The backlight intensity can be controlled and pre-set by the system to reduce the power consumption by up to 50%, which saves substantially on energy costs.

Hidden and control buttons

The local control buttons of the display are placed in such a way that they are less visible for immediate access. Furthermore the remote control sensor as well as the local control buttons can be disabled via RS232 to prevent unauthorized control of the display when placed in a public space.

Network controllability: RS232

Network controllability allows user to control and adjust monitors remotely through RS232 protocol.



Specifications

Picture/Display

- Display screen type: LCD Full HD W-UXGA Act. matrix
- Diagonal screen size: 46 inch / 116.8 cm
- Aspect ratio: 16:9
- Pixel pitch: 0.53025 x 0.53025 mm
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 450 cd/m²
- Contrast ratio (typical): 3500:1
- Display colors: 16.7 Million colors
- Viewing angle (H / V): 178 / 178 degree
- Response time (typical): 6.5 ms
- Horizontal Scanning Frequency: 31.5 - 91.1 kHz
- Vertical Scanning Frequency: 58 - 85 Hz
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, Picture in Picture, Progressive scan, 3D MA deinterlacing

Supported Display Resolution

Computer formats

Resolution	Refresh rate
640 x 480	60, 75Hz
720 x 400	70Hz
800 x 600	60Hz
1024 x 768	60Hz
1280 x 720	60Hz
1280 x 768	60Hz
1360 x 768	60Hz
1600 x 1200	60Hz
1920 x 1080	50, 60Hz

Video formats

Resolution	Refresh rate
480i	60Hz
480p	60Hz
576i	50Hz
720p	50, 60Hz
1080i	50, 60Hz
1080p	60Hz

Connectivity

- PC: VGA-in D-Sub 15HD, VGA-out D-Sub 15HD, RS232 D-Sub9, RS232 D-sub9 output, 3.5 mm PC audio input x1
- AV input: HDMI x2, Component (YPbPr) x1, Audio (L/R) for YPbPr x1, Composite (CVBS) x 2, S-video x1, Audio (L/R)x2 for CVBS & S-Vid

- AV output: Composite (CVBS) x1, Audio (L/R) x1
- Connectivity Enhancements: External Loudspeaker connector

Convenience

- OSD Languages: English, French, German, Italian, Spanish, Polish, Turkish, Russian, Simplified Chinese
- Detachable Audio: 2 x 7 Watts (optional) speakers
- Network controllable: RS232
- Placement: Portrait, Landscape
- VESA Mount: 400 x 200 mm

Power

- Consumption (On mode): Typ. 162W
- Mains power: 90-264 VAC, 50/60 Hz
- Standby power consumption: < 1W

Dimensions


- Set dimensions (W x H x D): 1122 x 663 x 138 mm
- Set dimensions in inch (W x H x D): 44.2 x 26.1 x 5.4 inch
- Set dimensions with stand (H x D): 705 x 406 mm
- Set dimensions with stand in inch (H x D): 27.8 x 16.0 inch
- MTBF: 50,000 (excl. CCFL 60,000) hrs
- Bezel thickness: 4.5 cm / 1.77 inch
- Product weight: 32.6 kg
- Product weight (lb): 71.9
- VESA Mount: 200x200mm, 400x200mm

Technical specifications

- Operating temperature range: 0 - 40 °C
- Relative humidity range: 5% - 90%

Accessories

- Included accessories: HDMI-DVI adapter cable, VGA cable, Remote Control, Batteries for remote control, User manual on CD-ROM, AC Power Cord, Quick start guide
- Optional accessories: Speakers BAL4631S1, Ceiling mount, Fixed wall mount, Flexible wall mount
- Stand: BM05211

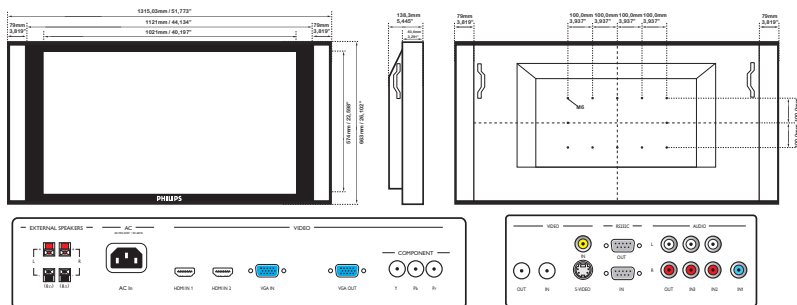

Issue date 2012-04-20

Version: 4.0.1

12 NC: 8670 000 83776
EAN: 87 12581 62493 4

© 2012 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips
Electronics N.V. or their respective owners.

www.philips.com

Legacy Technology Services

We Rent & Sell All Types Of Barcode Equipment

Call now to talk to an expert

866-271-9891

www.LegacyGlobal.com

Some brands we carry




MOTOROLA

Intermec

DATALOGIC™

Honeywell

**EQUINOX
PAYMENTS**



About us

- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

Latest Hardware from top manufacturers

- Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

Expert Repair and Maintenance services

- Legacy is one of the best repair facilities in North America

Discontinued product sourcing

- They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

Trade-in and Disposal services

- That old equipment laying around your facility may still have some value. Legacy routinely purchases equipment from our clients around the globe.
 - Data destruction
 - Hardware disposal
 - Auditing services

Dedicated client account team

- Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

Equipment rental services

- Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.



Legacy, Inc.

160 West Road,
Ellington, CT 06029

Toll Free: 866-271-9891

Fax: 888-522-4684